


## PNP General Purpose Amplifier



**SOT-323**

### Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- High Conductance
- Part no. with suffix "Q" means AEC-Q101 qualified

### Mechanical Data

- **Case:** SOT-323
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** K5N

### ■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Collector-Base Voltage	$V_{CBO}$	V		-40
Collector-Emitter Voltage	$V_{CEO}$	V		-40
Emitter-Base Voltage	$V_{EBO}$	V		-5
Collector Current -Continuous	$I_C$	mA		-200
Total Device Dissipation (*)	$P_D$	mW		200
Thermal Resistance Junction to Ambient (*)	$R_{thJA}$	K/W		625
Junction Temperature	$T_j$	°C		-55 to +150
Storage Temperature	$T_{STG}$	°C		-55 to +150

(\*) Device mounted on FR-4 PCB 1.0 x 1.0 x 0.06 inch



## ■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Max
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	Vdc	$I_C = -1\text{mA}, I_B = 0$	-40	
Collector-base breakdown voltage	$V_{(BR)CBO}$	Vdc	$I_C = -10\mu\text{A}, I_E = 0$	-40	
Emitter-base breakdown voltage	$V_{(BR)EBO}$	Vdc	$I_E = -10\mu\text{A}, I_C = 0$	-5	
Collector cut-off current	$I_{CBO}$	$\mu\text{A}$	$V_{CB} = -40\text{Vdc}, I_E = 0$		-0.1
Collector cut-off current	$I_{CEX}$	nA	$V_{CE} = -30\text{Vdc}, V_{EB} = -3.0\text{Vdc}$		-50
Emitter cut-off current	$I_{EBO}$	$\mu\text{A}$	$V_{EB} = -3\text{Vdc}, I_C = 0$		-0.1
DC current gain	$h_{FE}$		$V_{CE} = -1\text{Vdc}, I_C = -0.1\text{mA}$	40	
	$h_{FE}$		$V_{CE} = -1\text{Vdc}, I_C = -1.0\text{mA}$	70	
	$h_{FE}$		$V_{CE} = -1\text{Vdc}, I_C = -10\text{mA}$	100	300
	$h_{FE}$		$V_{CE} = -1\text{Vdc}, I_C = -50\text{mA}$	60	
	$h_{FE}$		$V_{CE} = -1\text{Vdc}, I_C = -100\text{mA}$	30	
Collector-emitter saturation voltage	$V_{CE(sat)}$	Vdc	$I_C = -10\text{mA}, I_B = -1.0\text{mA}$		-0.25
			$I_C = -50\text{mA}, I_B = -5.0\text{mA}$		-0.4
Base-emitter saturation voltage	$V_{BE(sat)}$	Vdc	$I_C = -10\text{mA}, I_B = -1.0\text{mA}$	-0.65	-0.85
			$I_C = -50\text{mA}, I_B = -5.0\text{mA}$		-0.95
Transition frequency	$f_T$	MHz	$V_{CE} = -20\text{V}, I_C = -10\text{mA}, f = 100\text{MHz}$	250	-
Delay time	$t_d$	ns	$V_{CC} = -3.0\text{Vdc}, V_{BE} = -0.5\text{Vdc}, I_C = -10\text{mA}, I_{B1} = -1.0\text{mA}$		35
Rise time	$t_r$	ns			35
Storage time	$t_s$	ns	$V_{CC} = -3.0\text{Vdc}, I_C = -10\text{mA}, I_{B1} = I_{B2} = -1.0\text{mA}$		225
Fall time	$t_f$	ns			75

## ■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMST3906Q	F2	Approximate 0.006	3000	30000	120000	7" reel



■ Characteristics (Typical)

Fig.1 - Static Characteristic

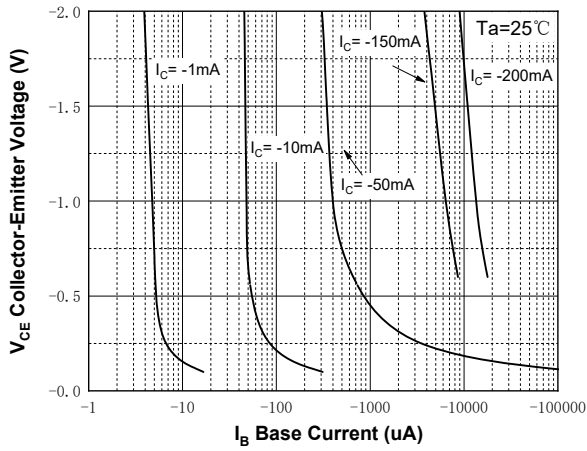


Fig.2 - DC Current Gain

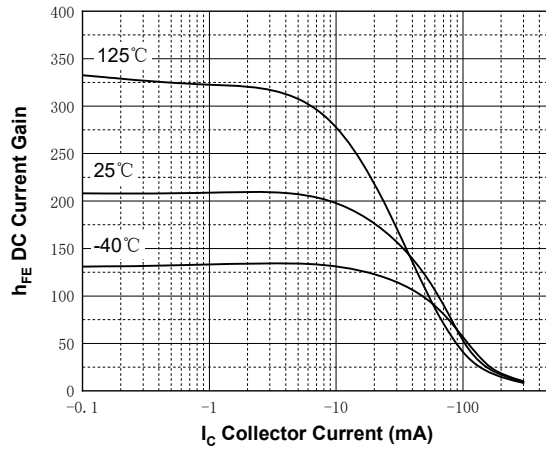


Fig.3 - Collector-Emitter Saturation Voltage

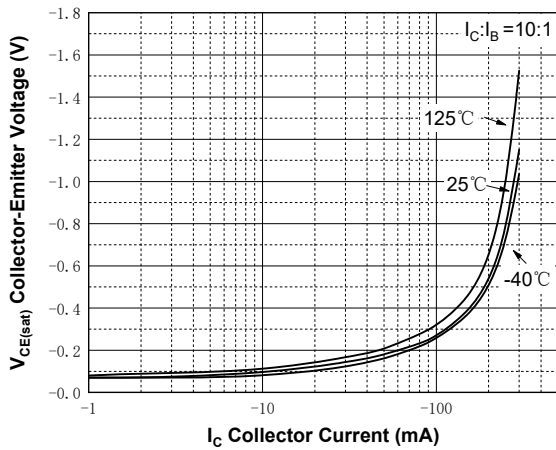


Fig.4 - Base-Emitter Saturation Voltage



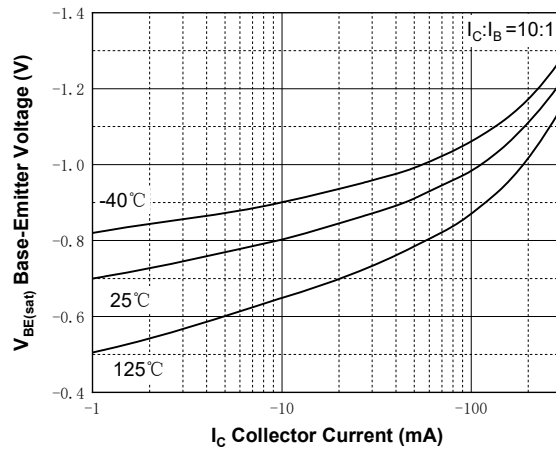


Fig.5 - Capacitance

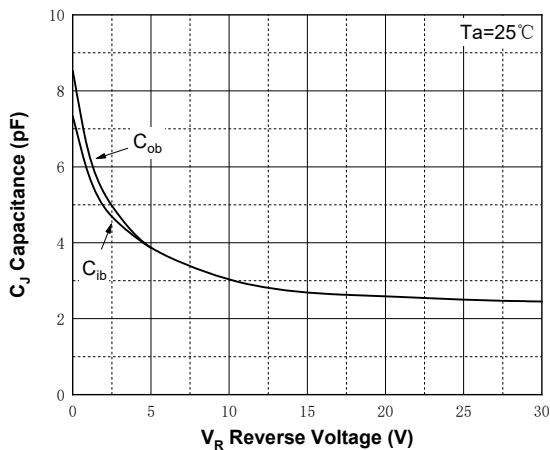


## ■ SOT-323 Package Outline Dimensions

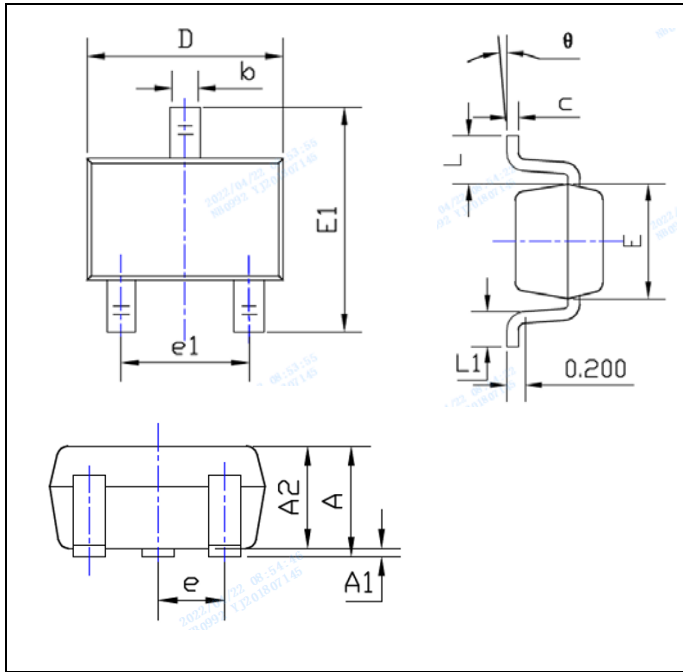

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.006	0.016	0.150	0.400
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e	0.026TYP		0.650TYP	
e1	0.047	0.055	1.200	1.400
L	0.021REF		0.525REF	
L1	0.010	0.018	0.260	0.460
θ	0°	8°	0°	8°

## ■ SOT-323 Suggested Pad Layout

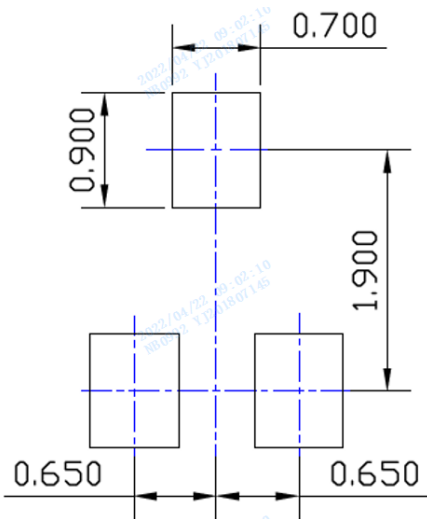

Unit: mm



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.