



## Surface Mount Zener Diodes

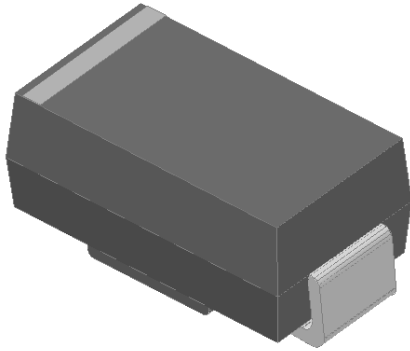

### Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

### Mechanical Data

- **Package:** DO-214AC (SMA)  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

### ■Maximum Ratings (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MAX
DC power dissipation at TL = 75 °C	P <sub>D</sub>	W	1
Maximum instantaneous forward voltage@ I <sub>F</sub> =200mA	V <sub>F</sub>	V	1.2
Maximum junction temperature	T <sub>j</sub>	°C	-55 to +150
Storage temperature range	T <sub>stg</sub>	°C	-55 to +150

### ■Thermal Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Thermal resistance(Typical)	R <sub>θJ-L</sub> <sup>(1)</sup>	°C/W	junction to lead	30
	R <sub>θJ-A</sub> <sup>(1)</sup>	°C/W	junction to ambient	170

Note

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

### ■Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum Surge Current	Maximum DC Zener Current
	Min V <sub>Z</sub> <sup>(1)</sup> at I <sub>ZT</sub>	Typ. V <sub>Z</sub> <sup>(1)</sup> at I <sub>ZT</sub>	Max V <sub>Z</sub> <sup>(1)</sup> at I <sub>ZT</sub>	I <sub>ZT</sub>	Z <sub>ZT</sub> at I <sub>ZT</sub>	Z <sub>ZK</sub> at I <sub>ZK</sub>	I <sub>ZK</sub>	I <sub>R</sub>	Test voltage V <sub>R</sub>	I <sub>RM</sub> <sup>(2)</sup>	I <sub>ZM</sub>
	V	V	V	mA	Ω	Ω	mA	μA	V	mA	mA
SMA4727A	2.85	3.0	3.15	80.0	10.0	400	1.00	100.0	1.0	1485	288.0
SMA4728A	3.14	3.3	3.47	76.0	10.0	400	1.00	100.0	1.0	1370	274.0
SMA4729A	3.42	3.6	3.78	69.0	10.0	400	1.00	100.0	1.0	1255	251.0
SMA4730A	3.71	3.9	4.10	64.0	9.0	400	1.00	50.0	1.0	1160	232.0
SMA4731A	4.09	4.3	4.52	58.0	9.0	400	1.00	10.0	1.0	1050	210.0
SMA4732A	4.47	4.7	4.94	53.0	8.0	500	1.00	10.0	1.0	960	192.0



# SMA47XXA SERIES

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum Surge Current	Maximum DC Zener Current
	Min $V_Z^{(1)}$ at $I_{ZT}$	Typ. $V_Z^{(1)}$ at $I_{ZT}$	Max $V_Z^{(1)}$ at $I_{ZT}$		$I_{ZT}$	$Z_{ZT}$ at $I_{ZT}$	$Z_{ZK}$ at $I_{ZK}$	$I_{ZK}$	$I_R$		
	V	V	V	mA	$\Omega$	$\Omega$	mA	$\mu A$	V	mA	mA
SMA4733A	4.85	5.1	5.36	49.0	7.0	550	1.00	10.0	1.0	885	177.0
SMA4734A	5.32	5.6	5.88	45.0	5.0	600	1.00	10.0	2.0	805	161.0
SMA4735A	5.89	6.2	6.51	41.0	2.0	700	1.00	10.0	3.0	730	146.0
SMA4736A	6.46	6.8	7.14	37.0	3.5	700	1.00	10.0	4.0	660	133.0
SMA4737A	7.13	7.5	7.88	34.0	4.0	700	0.50	10.0	5.0	605	121.0
SMA4738A	7.79	8.2	8.61	31.0	4.5	700	0.50	10.0	6.0	550	110.0
SMA4739A	8.65	9.1	9.56	28.0	5.0	700	0.50	10.0	7.0	500	100.0
SMA4740A	9.50	10.0	10.50	25.0	7.0	700	0.25	10.0	7.6	454	91.0
SMA4741A	10.45	11.0	11.55	23.0	8.0	700	0.25	5.0	8.4	414	83.0
SMA4742A	11.40	12.0	12.60	21.0	9.0	700	0.25	5.0	9.1	380	76.0
SMA4743A	12.35	13.0	13.65	19.0	10.0	700	0.25	5.0	9.9	344	69.0
SMA4744A	14.25	15.0	15.75	17.0	14.0	700	0.25	5.0	11.4	304	61.0
SMA4745A	15.20	16.0	16.80	15.5	16.0	700	0.25	5.0	12.2	285	57.0
SMA4746A	17.10	18.0	18.90	14.0	20.0	750	0.25	5.0	13.7	250	50.0
SMA4747A	19.00	20.0	21.00	12.5	22.0	750	0.25	5.0	15.2	225	45.0
SMA4748A	20.90	22.0	23.10	11.5	23.0	750	0.25	5.0	16.7	205	41.0
SMA4749A	22.80	24.0	25.20	10.5	25.0	750	0.25	5.0	18.2	190	38.0
SMA4750A	25.65	27.0	28.35	9.5	35.0	750	0.25	5.0	20.6	170	34.0
SMA4751A	28.50	30.0	31.50	8.5	40.0	1000	0.25	5.0	22.8	150	30.0
SMA4752A	31.35	33.0	34.65	7.5	45.0	1000	0.25	5.0	25.1	135	27.0
SMA4753A	34.20	36.0	37.80	7.0	50.0	1000	0.25	5.0	27.4	125	25.0
SMA4754A	37.05	39.0	40.95	6.5	60.0	1000	0.25	5.0	29.7	115	23.0
SMA4755A	40.85	43.0	45.15	6.0	70.0	1500	0.25	5.0	32.7	110	22.0
SMA4756A	44.65	47.0	49.35	5.5	80.0	1500	0.25	5.0	35.8	95	19.0
SMA4757A	48.45	51.0	53.55	5.0	95.0	1500	0.25	5.0	38.8	90	18.0
SMA4758A	53.20	56.0	58.80	4.5	110.0	2000	0.25	5.0	42.6	80	16.0
SMA4759A	58.90	62.0	65.10	4.0	125.0	2000	0.25	5.0	47.1	70	14.0
SMA4760A	64.60	68.0	71.40	3.7	150.0	2000	0.25	5.0	51.7	65	13.0
SMA4761A	71.25	75.0	78.75	3.3	175.0	2000	0.25	5.0	56.0	60	12.0
SMA4762A	77.90	82.0	86.10	3.0	200.0	3000	0.25	5.0	62.2	55	11.0
SMA4763A	86.45	91.0	95.55	2.8	250.0	3000	0.25	5.0	69.2	50	10.0
SMA4764A	95.00	100.0	105.00	2.5	350.0	3000	0.25	5.0	76.0	45	9.0
SZ1110A	104.50	110.0	115.50	2.3	450.0	4000	0.25	5.0	83.6	40	8.6
SZ1120A	114.00	120.0	126.00	2.0	550.0	4500	0.25	5.0	91.2	37	7.8
SZ1130A	123.50	130.0	136.50	1.9	700.0	5000	0.25	5.0	98.8	34	7.0



# SMA47XXA SERIES

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum Surge Current	Maximum DC Zener Current
	Min $V_Z^{(1)}$ at $I_{ZT}$	Typ. $V_Z^{(1)}$ at $I_{ZT}$	Max $V_Z^{(1)}$ at $I_{ZT}$	$I_{ZT}$	$Z_{ZT}$ at $I_{ZT}$	$Z_{ZK}$ at $I_{ZK}$	$I_{ZK}$	$I_R$	Test voltage $V_R$	$I_{RM}^{(2)}$	$I_{ZM}$
	V	V	V	mA	$\Omega$	$\Omega$	mA	$\mu A$	V	mA	mA
SZ1150A	142.50	150.0	157.50	1.7	1000.0	6000	0.25	5.0	114.0	30	6.4
SZ1160A	152.00	160.0	168.00	1.6	1100.0	6500	0.25	5.0	121.6	28	5.8
SZ1180A	171.00	180.0	189.00	1.4	1200.0	7000	0.25	5.0	136.8	25	5.2
SZ1200A	190.00	200.0	210.00	1.2	1900.0	9990	0.25	5.0	152.0	22	4.7
SZ1220A	209.00	220.0	231.00	1.0	1600.0	8000	0.25	5.0	167.2	20	4.0
SZ1240A	228.00	240.0	252.00	0.9	1800.0	8500	0.25	5.0	182.4	19	3.8
SZ1250A	237.50	250.0	262.50	0.9	2000.0	9000	0.25	5.0	190.0	18	3.6
SZ1270A	256.50	270.0	283.50	0.8	2100.0	9000	0.25	5.0	205.0	16	3.3
SZ1300A	285.00	300.0	315.00	0.8	2300.0	9500	0.25	5.0	228.0	15	3.0
SZ1330A	313.50	330.0	346.50	0.7	2500.0	9500	0.25	5.0	250.2	13	2.7
SZ1360A	342.00	360.0	378.00	0.7	2700.0	10000	0.25	5.0	275.0	12	2.5
SZ1390A	370.50	390.0	409.50	0.7	3000.0	10000	0.25	5.0	300.0	11	2.2

Notes:

(1) Nominal Zener voltage Range: 95% Typ. $V_Z$  (1)at  $I_{ZT}$ ----105% Typ. $V_Z$  (1)at  $I_{ZT}$

(2) Surge current is a non-repetitive, 8.3ms pulse width square wave or equivalent sine-wave superimposed on  $I_{ZT}$  per JEDEC method

## ■ Characteristics (Typical)

FIG1: Power Temperature Derating Curve


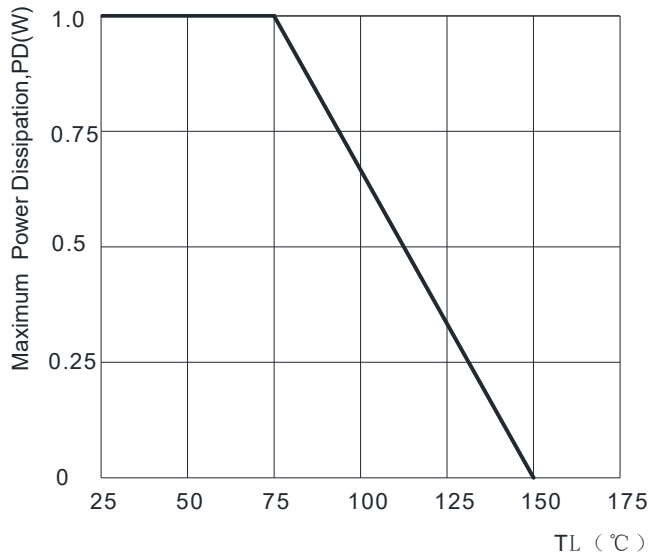


FIG2: Typical Zener Impedance



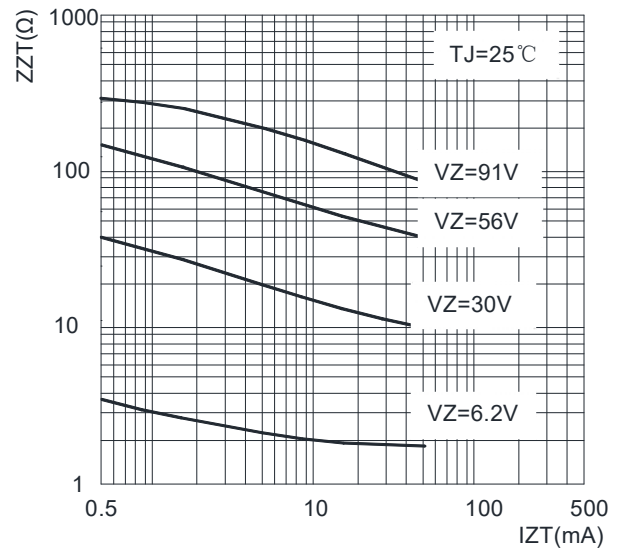

# SMA47XXA SERIES

## ■ Characteristics (Typical)

FIG3: Pulse Waveform

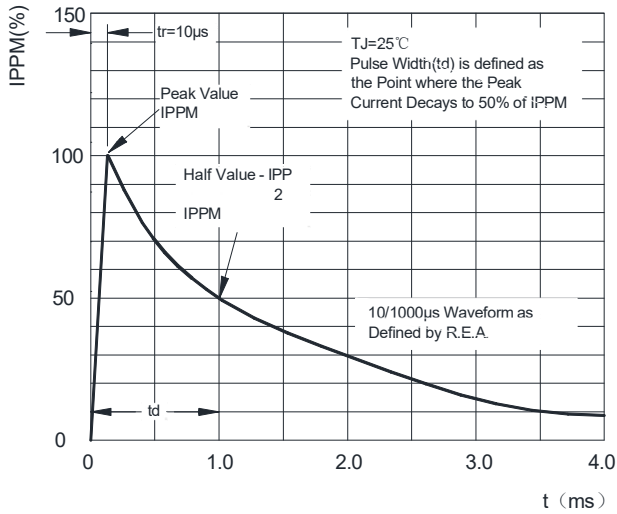


FIG4: Temperature Coefficients v.s. Zener Voltage


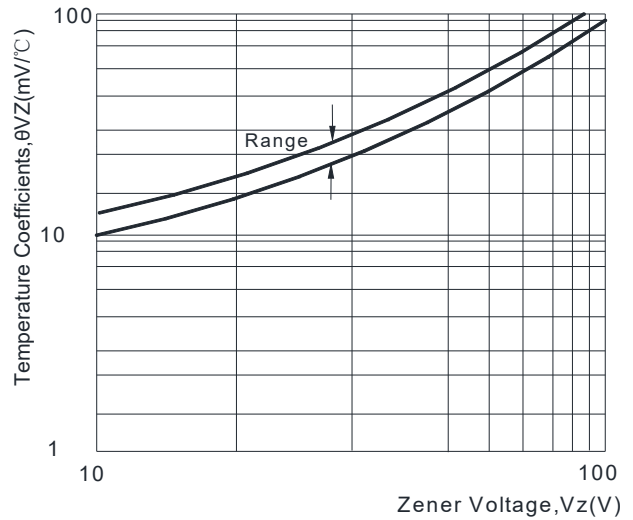


FIG5: Maximum Surge Power




## ■ Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SMA47XXA SERIES	F1	Approximate 0.059	5000	/	80000	13" reel
SMA47XXA SERIES	F2	Approximate 0.059	7500	/	120000	13" reel
SMA47XXA SERIES	F3	Approximate 0.059	7500	/	60000	13" reel
SMA47XXA SERIES	F4	Approximate 0.059	1800	7200	57600	7" reel
SMA47XXA SERIES	F5	Approximate 0.059	2000	8000	64000	7" reel
SMA47XXA SERIES	F6	Approximate 0.059	5000	/	100000	13" reel

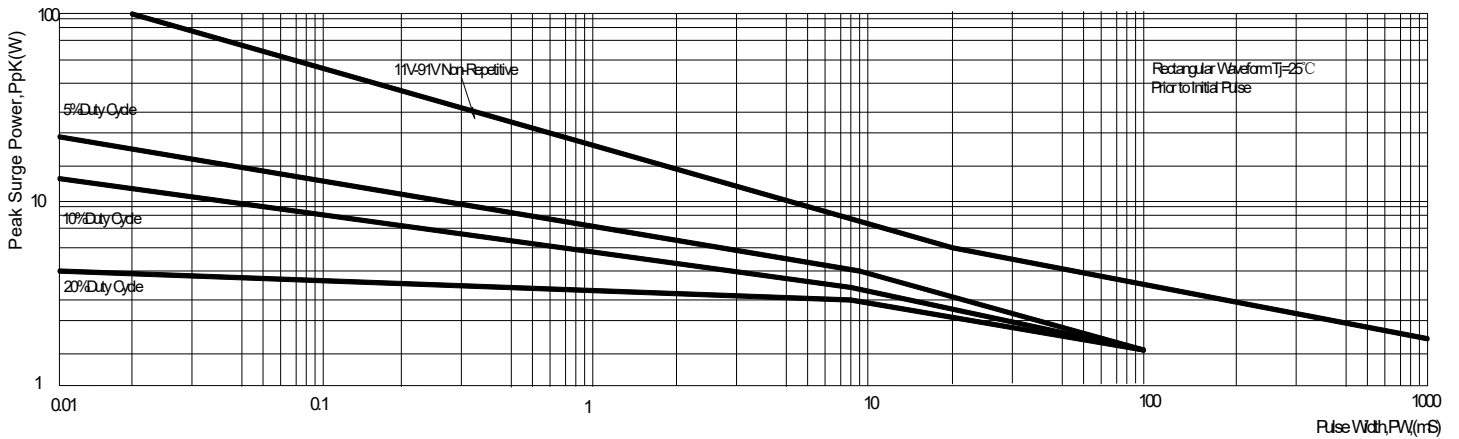


# SMA47XXA SERIES

## ■ Outline Dimensions

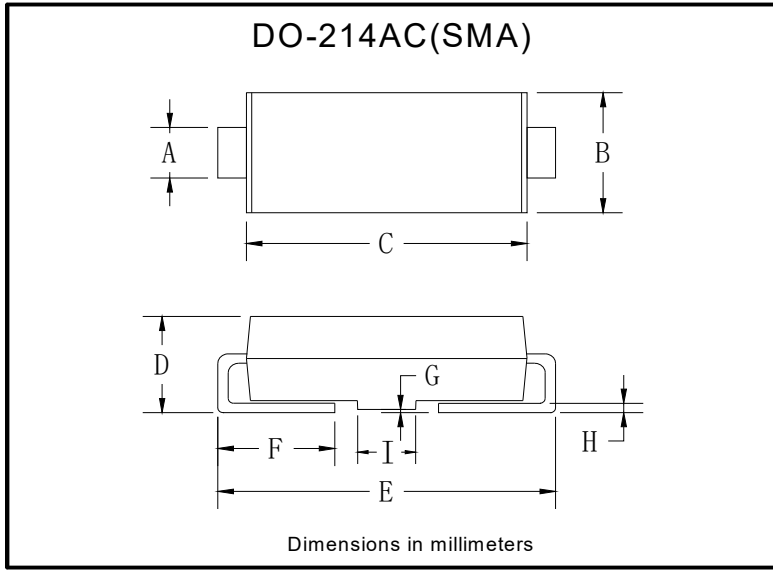

DO-214AC(SMA)		
Dim	Min	Max
A	1.25	1.58
B	2.40	2.83
C	4.00	4.75
D	1.90	2.30
E	4.93	5.28
F	0.76	1.41
G	0.05	0.20
H	0.15	0.31
I	1.70	2.10

## ■ Suggested Pad Layout

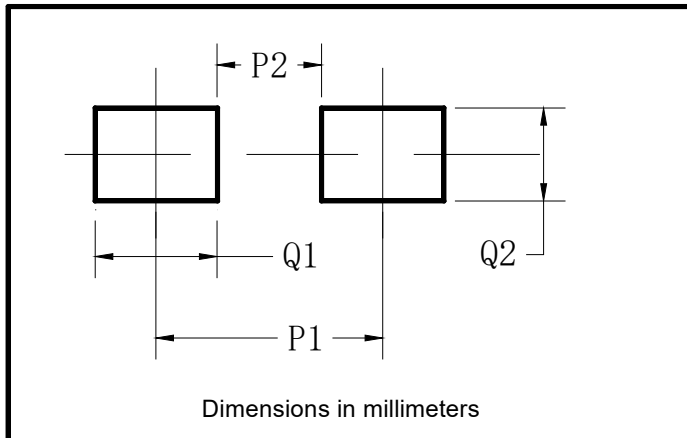

DO-214AC(SMA)	
Dim	Millimeters
P1	4.00
P2	1.50
Q1	2.50
Q2	1.70



## SMA47XXA SERIES

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.