


## YJD106506PQG2Q

# Silicon Carbide Schottky Diode

V <sub>RRM</sub>	650 V
I <sub>F</sub> (135°C)	10 A
Q <sub>C</sub>	25 nC

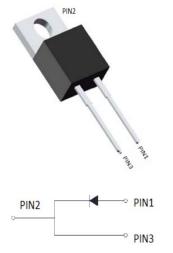

#### Features

- Positive temperature coefficient
- Temperature-independent switching
- Maximum working temperature at 175 °C
- Unipolar devices and zero reverse recovery current
- Zero forward recovery current
- Essentially no switching losses
- Reduction of heat sink requirements
- AEC-Q101 qualified
- High-frequency operation
- Reduction of EMI

#### **Typical Applications**

Typical applications are in power factor correction(PFC), solar inverter, uninterruptible power supply, motor drives, photovoltaic inverter, electric car and charger.

#### **Mechanical Data**

- Package: TO-220AC Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Tin plated leads
- Polarity: As marked

#### ■Maximum Ratings (T<sub>c</sub>=25<sup>°</sup>C Unless otherwise specified)

PARAMTETER	SYMBOL	UNIT	VALUE
Device marking code			D106506PQG2
Reverse voltage (repetitive peak) @ T <sub>j</sub> =25°C	V <sub>RRM</sub>	V	650
Reverse voltage (Surge Peak) @ Tj=25°C	V <sub>RSM</sub>	V	650
Reverse voltage (DC) @ Tj=25°C	V <sub>DC</sub>	V	650
Continuous forward current @ T <sub>c</sub> =25°C			21
Continuous forward current @ $T_c$ =135°C	I <sub>F</sub>	А	10
Continuous forward current @ T <sub>c</sub> =157°C			6
Non-repetitive peak forward surge current @ T <sub>c</sub> =25°C, tp=10ms, Half Sine Wave	I <sub>FSM</sub>	А	65
Power Dissipation@ T <sub>c</sub> =25°C		14/	84
Power Dissipation@ T <sub>c</sub> =110°C	P <sub>TOT</sub>	W	36
i²t Value@ Tc=25°C ,tp=10ms	∫ i²dt	A <sup>2</sup> S	21
Operating junction and Storage temperature range	T <sub>j</sub> ,T <sub>stg</sub>	°C	-55 to +175


#### Electrical Characteristics


PARAMTETER	SYMBOL	UNIT	TEST CONDITIONS	Тур.	Max.		
Forward voltage drap	M	V <sub>F</sub> V	I <sub>F</sub> =6A, T <sub>j</sub> =25°C	1.31	1.5		
Forward voltage drop	VF		I <sub>F</sub> =6A, T <sub>j</sub> =175°C	1.65	-		
Reverse leakage current	kage current I <sub>R</sub> μ				V <sub>R</sub> =650V, T <sub>j</sub> =25°C	0.5	25
Neverse leakage current		μA	V <sub>R</sub> =650V, T <sub>j</sub> =175°C	5	-		
Total capacitive charge	Qc	nC	$V_R$ =400V, T <sub>j</sub> =25°C , QC= $\int_0^{VR}$ C(V)dV	25	-		
	icitance C		V <sub>R</sub> =0V, f=1MHZ	378	-		
Total capacitance		pF	V <sub>R</sub> =200V, f=1MHZ	51	-		
			V <sub>R</sub> =400V, f=1MHZ	49	-		
Capacitance Stored Energy	Ec	μJ	V <sub>R</sub> =400V	3	-		


#### ■Thermal Characteristics (Ta=25°C Unless otherwise specified)


PARAMETER	SYMBOL	UNIT	Value
Thermal resistance	R <sub>øJ-C</sub>	°C W	1.78

### ■Typical Characteristics

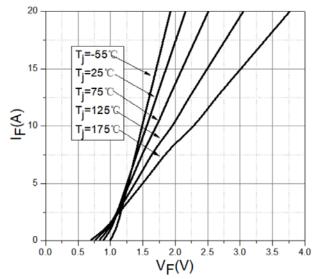



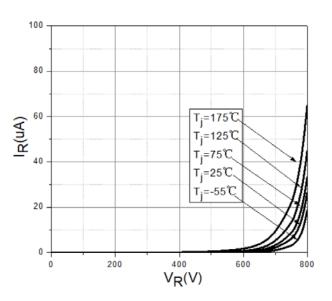



2/5

YJD106506PQG2Q



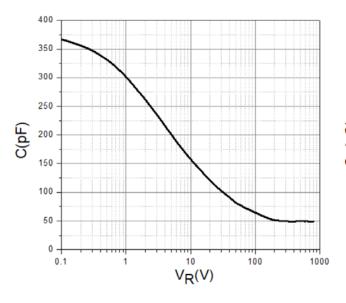


Figure 3. Capacitance vs. Reverse Voltage

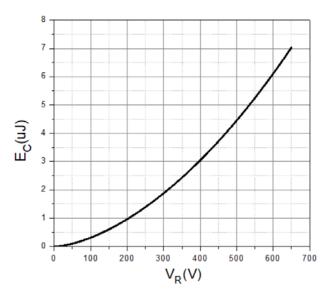



80 70 10% Duty 20% Duty 60 30% Duty 50% Duty 50 I<sub>F(peak)</sub>(A) 70% Duty DC 40 30 20 10 0 L 25 50 75 100 125 150 175 T<sub>c</sub>(℃) Figure 7. Current Derating



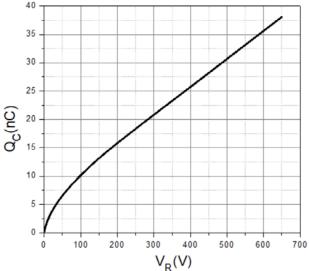



Figure 4. Total Capacitance Charge vs. Reverse Voltage



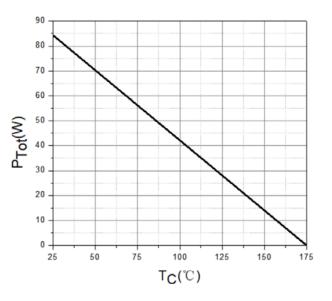

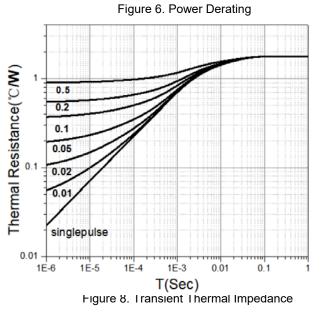

#### Outline Dimensions

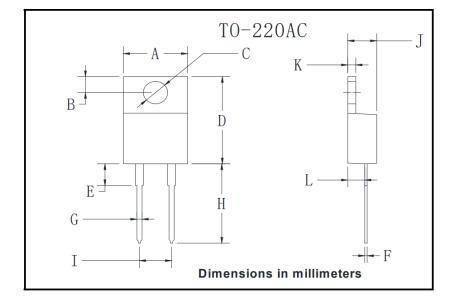

TO-220AC				
Dim	Min	Max		
А	9.95	10.35		
В	2.55	2.95		
С	3.75	4.05		
D	14.95	15.25		
E	3.75	4.25		
F	0.26	0.5		
G	0.68	0.94		
Н	13.3	13.9		
I.	4.86	5.26		
J	4.38	4.78		
К	1.14	1.4		
L	2.37	2.79		

4 / 5



#### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.