


# **Silicon Carbide Schottky Diode**

V <sub>RRM</sub>	650V
I <sub>F (135°C)</sub>	13A
$Q_{C}$	60nC

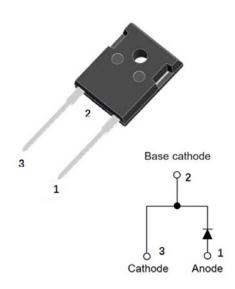

#### Foatures

- Positive temperature coefficient
- Temperature-independent switching
- Maximum working temperature at 175 °C
- Unipolar devices and zero reverse recovery current
- Zero forward recovery voltage
- Essentially no switching losses
- Reduction of heat sink requirements
- AEC-Q101 qualified
- High-frequency operation
- Reduction of EMI

#### **Typical Applications**

Typical applications are in power factor correction(PFC), solar inverter, uninterruptible power supply, motor drives, photovoltaic inverter, electric car and charger.

### **Mechanical Data**

• Package: TO-247AC

Molding compound meets UL 94 V-0 flammability

rating, RoHS-compliant, halogen-free
• Terminals: Tin plated leads

• Polarity: As marked

## ■Maximum Ratings (T<sub>C</sub>=25°C Unless otherwise specified)

PARAMTETER	SYMBOL	UNIT	VALUE
Device marking code			D106510NQG2
Reverse voltage (repetitive peak) @ T <sub>i</sub> =25°C	$V_{RRM}$	V	650
Reverse voltage (Surge Peak) @ T <sub>j</sub> =25°C	$V_{RSM}$	V	650
Reverse voltage (DC) @ T <sub>j</sub> =25°C	$V_{DC}$	V	650
Continuous forward current @ T <sub>c</sub> =25°C			27
Continuous forward current @ T <sub>c</sub> =135°C	I <sub>F</sub>	Α	13
Continuous forward current @ T <sub>c</sub> =153°C			10
Non-repetitive peak forward surge current @ T <sub>c</sub> =25°C, tp=10ms, Half Sine Wave	I <sub>FSM</sub>	Α	70
Power Dissipation@ T <sub>c</sub> =25°C	D	W	126
Power Dissipation@ T <sub>c</sub> =110°C	P <sub>TOT</sub>	VV	54
i²t Value@ Tc=25°C ,tp=10ms	∫ i²dt	A <sup>2</sup> S	24
Operating junction and Storage temperature range	$T_{j}$ , $T_{stg}$	°C	-55 to +175



## YJD106510NQG2Q



#### **■**Electrical Characteristics

PARAMTETER	SYMBOL	UNIT	TEST CONDITIONS	Тур.	Max.	
Forward voltage drap	V <sub>F</sub> V	V	I <sub>F</sub> =10A, T <sub>j</sub> =25°C	1.35	1.55	
Forward voltage drop		VF	VF	V	I <sub>F</sub> =10A, T <sub>j</sub> =175°C	1.8
Povorco logicado gurrent		V <sub>R</sub> =650V, T <sub>j</sub> =25°C	0.5	5		
Reverse leakage current I <sub>F</sub>	I <sub>R</sub>	μA	V <sub>R</sub> =650V, T <sub>j</sub> =175°C	2	-	
Total capacitive charge	Qc	nC	$V_R$ =400V, $T_j$ =25°C, $QC = \int_0^{VR} C(V) dV$	30	-	
			V <sub>R</sub> =0V, f=1MHZ	543	-	
Total capacitance	С	pF	V <sub>R</sub> =200V, f=1MHZ	55	-	
			V <sub>R</sub> =400V, f=1MHZ	52	-	
Capacitance Stored Energy	Ec	μJ	V <sub>R</sub> =400V	3.7	-	

### **■Thermal Characteristics** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Value
Thermal resistance	R <sub>eJ-C</sub>	°C W	1.19

## ■Typical Characteristics

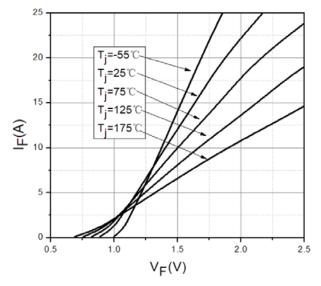


Figure 1. Forward Characteristics

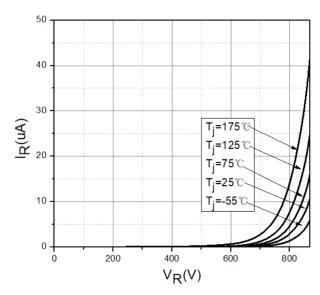


Figure 2. Reverse Characteristic



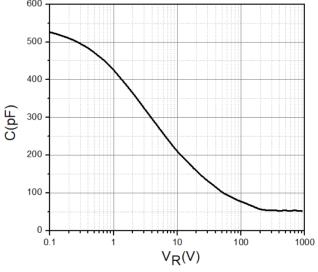


Figure 3. Capacitance vs. Reverse Voltage

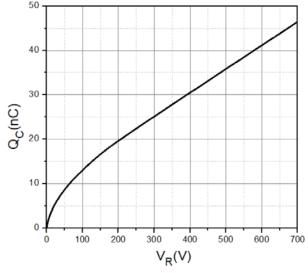


Figure 4. Total Capacitance Charge vs. Reverse Voltage

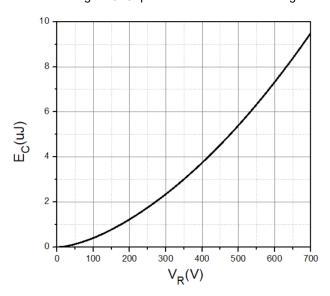


Figure 5. Capacitance Stored Energy

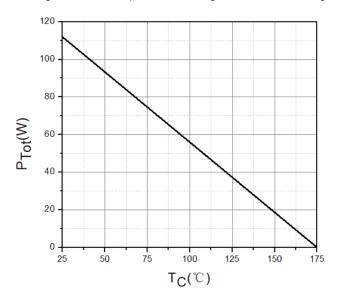


Figure 6. Power Derating

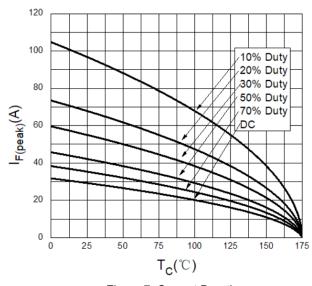


Figure 7. Current Derating


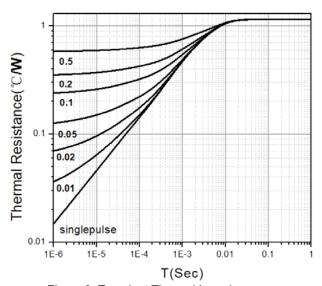


Figure 8. Transient Thermal Impedance





#### **■**Outline Dimensions

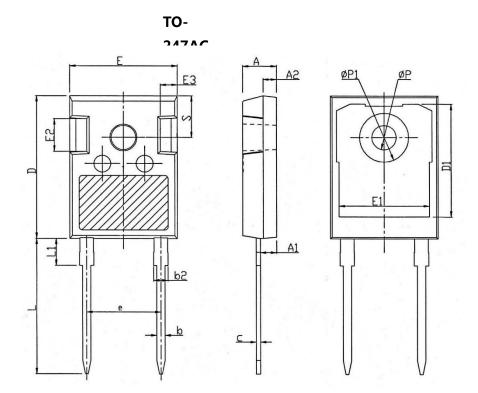

TO-247AC				
Dim	Min	Max		
Α	4.80	5.20		
A1	2.21	2.61		
A2	1.85	2.15		
b	1.11	1.36		
b2	1.91	2.21		
С	0.51	0.75		
D	20.70	21.30		
D1	16.25	16.85		
Е	15.50	16.10		
E1	13.00	13.60		
E2	4.80	5.20		
E3	2.30	2.70		
е	10.88BSC			
L	19.62	20.22		
L1	-	4.30		
φР	3.40	3.80		
φP1		7.30		
S	6.15BSC			



## YJD106510NQG2Q



#### **Disclaimer**

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// <a href="http://www.21yangjie.com">www.21yangjie.com</a>, or consult your nearest Yangjie's sales office for further assistance.